

Octo 530

Height 133 cm

ref. 27122210



A hassle-free pool generously proportioned.

Pool structure made of class IV autoclaved Northern Pine, MTi filtration group, easy to install, removable access ladder, double width pine coping, dark blue Aqualiner® 0.75 mm liner.




Standard compliant equipment

Every Procopi pool complies with the standards in effect governing pool kits, including the new French standards that came into effect in February 2011:

- **NF P90-316** >> Private family pools - pool kits - general safety requirements and test methods.
- **NF P90-317** >> Private family pools - means of access - general safety requirements and test methods.

- **NF P90-318** >> Private family pools - filtration groups and/or filtration systems - general safety requirements and test methods. Accreditation tests are carried out by an independent laboratory that is entitled to demand modifications to the equipment or installation instructions should it deem this to be necessary. Once all tests have been passed, the laboratory issues a certificate for each pool model tested.

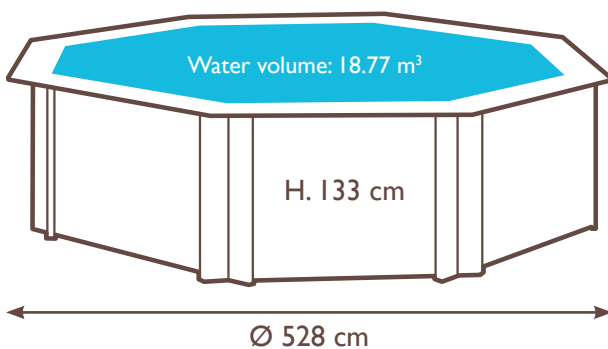

Procopi is PEFC certified (chain of custody: FCBA/12-01382) for procurement of wood from sustainably managed forests according to the regulations set out by the Programme for the Endorsement of Forest Certification.

The PEFC label pertains to wood from European forests. Labelled CTB-B+ SP by the CTBA (The denomination SP was created for CTB-P+ and CTB-B+ certifications to indicate enhanced retention of organic copper type products).



Wooden structure
Pool fittings
Liner



Filter



Pump & ladder

27122210 Wooden pool Weva Octo 530
Double pine, Dark blue, Height: 133



Price



Made in France

EXPRESS
POOL

PROCOPI
Pool & Spa Equipment

Octo 530

Height 133 cm

ref. 27122210




Made in France

WEVA OCTO

Weva



Assembly



+



Model	Octo 530
Supplier reference	27122210
Outer dimensions (cm)	
Inner dimensions (cm)	
Height, coping included (cm)	133
Water volume (m ³)	18.77
Pool surface area (m ²)	15.64
Metal support braces	○
Double width pine coping, thickness 28 mm, width 290 mm (2 x 145 mm)	●
Solid, Northern Pine, class IV treated, autoclaved slats, thickness in mm, tolerance + or - 1 mm	45
Liner thickness	0.75 mm
Liner colour	Dark blue
Number of skimmers	1
Number of return fittings	1
45mm hydraulic fittings suitable for burying	●
Sand filter	Magic
Sand filter diameter (mm)	500 EH
Flow rate at the return fitting (m ³ /h)	7.90
Quantity of sand provided (kg)	50
6-way valve (filtration/wash/rinse/circulation/drain/closed)	●
¼ turn isolating valves return/suction	1/1
In-pool stainless steel ladder	3 treads
Wooden access ladder	4 treads
Underlay	●
Bubble cover	○
Electrical panel	○
Underwater spot light	○
Dechlorinator	○
Installation instructions	●
Guarantee on the structure	10 years
Guarantee on the liner	10 years
Guarantee on the filter	5 years
Guarantee on the pump and the ladder	2 years



Wooden structure
Pool fittings
Liner



Filter



Pump and ladder

● : included
○ : not included

EXPRESS POOL